Kershaw County's Youth

VIDEO GAME Programmers

@ The Kershaw County Library - Camden Branch

TAUGHT BY:

CONOR X. ROM

CITADEL CLASS OF 2025 / TAX ACCOUNTANT / SCSG ADMIN OFFICER

FREE CLASSES

Jan 13th, 27th,

Feb 10th, & 24th

3:30-4:30pm

KERSHAW COUNTY VIDEO GAME PROGRAMMERS, DESIGNER, & ARTISTS SOUTH CAROLINA

Mana Rock Gaming

KCL | KERSHAW COUNTY LIBRARY

LESSON 2: ACTION

ADDING SOME OBSTACLES

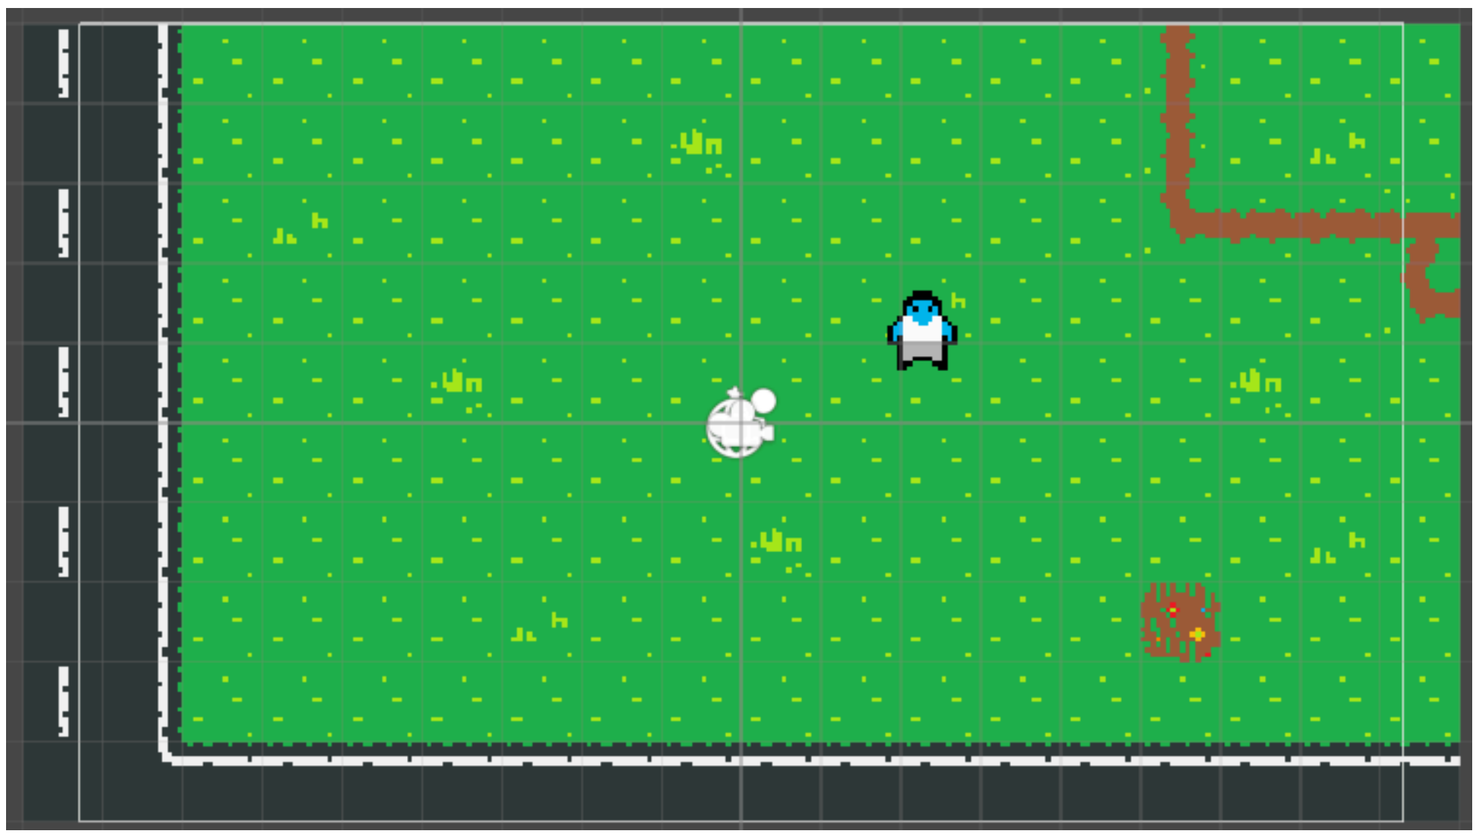

CHECK OUT LESSON #1: BASIC MOVEMENT AT MANAROCKGAMING.COM

THE GOAL OF THIS LESSON IS TO ADD SOME DETAILS TO OUR WORLD & ADD SOME BASIC COMBAT ABILITIES

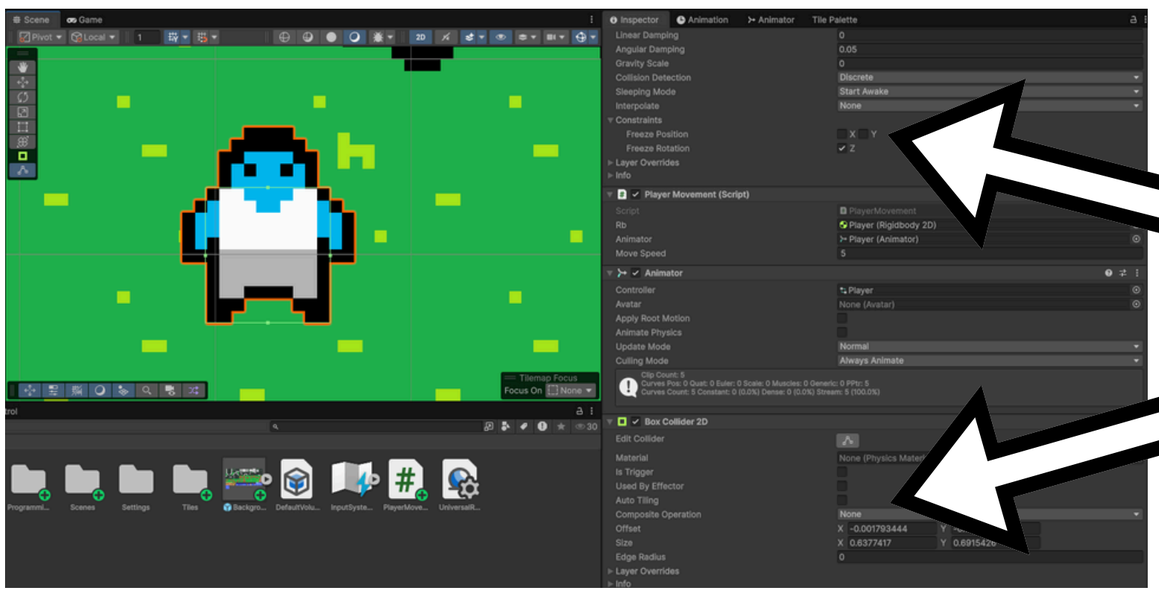

ADD/SHAPE A BOX COLLIDER 2D TO THE PLAYER & LOCK RIGIDBODY 2D CONSTRAINT ON Z ROTATION

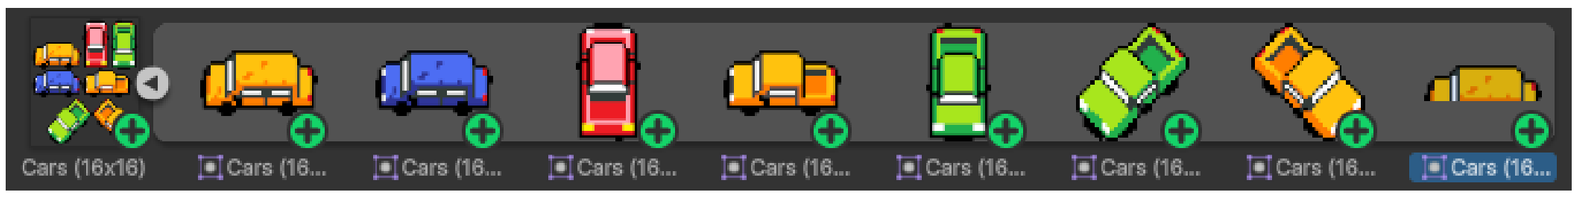

CREATE A CAR TOP SPRITE

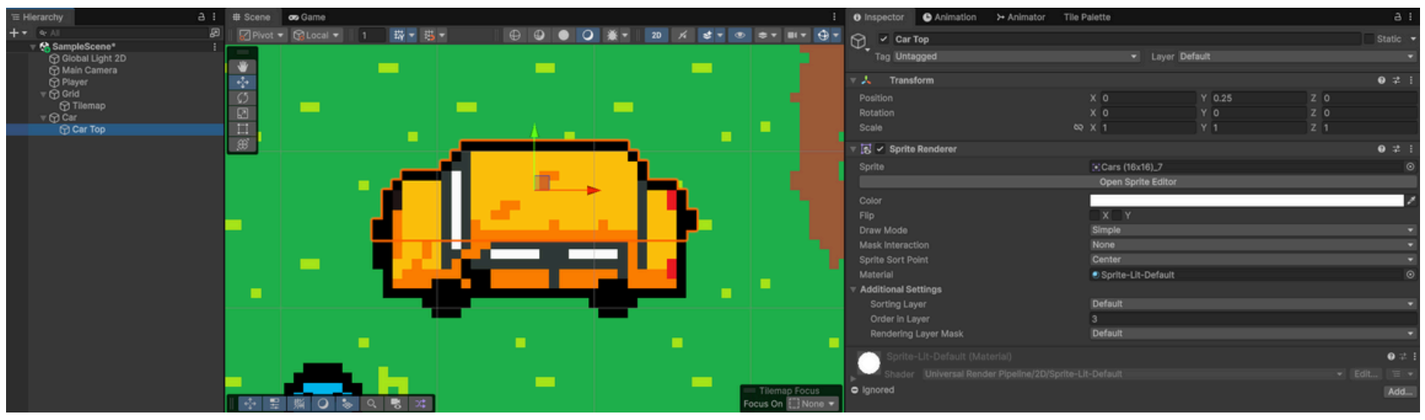

ADD CAR TO SCENE ADD CHILD OF CAR TOP WITH SPRITE LAYER 3

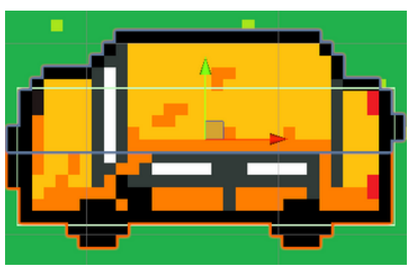

ADD BOX COLLIDER 2D TO LOWER HALF OF CAR

CAMERA FOLLOW

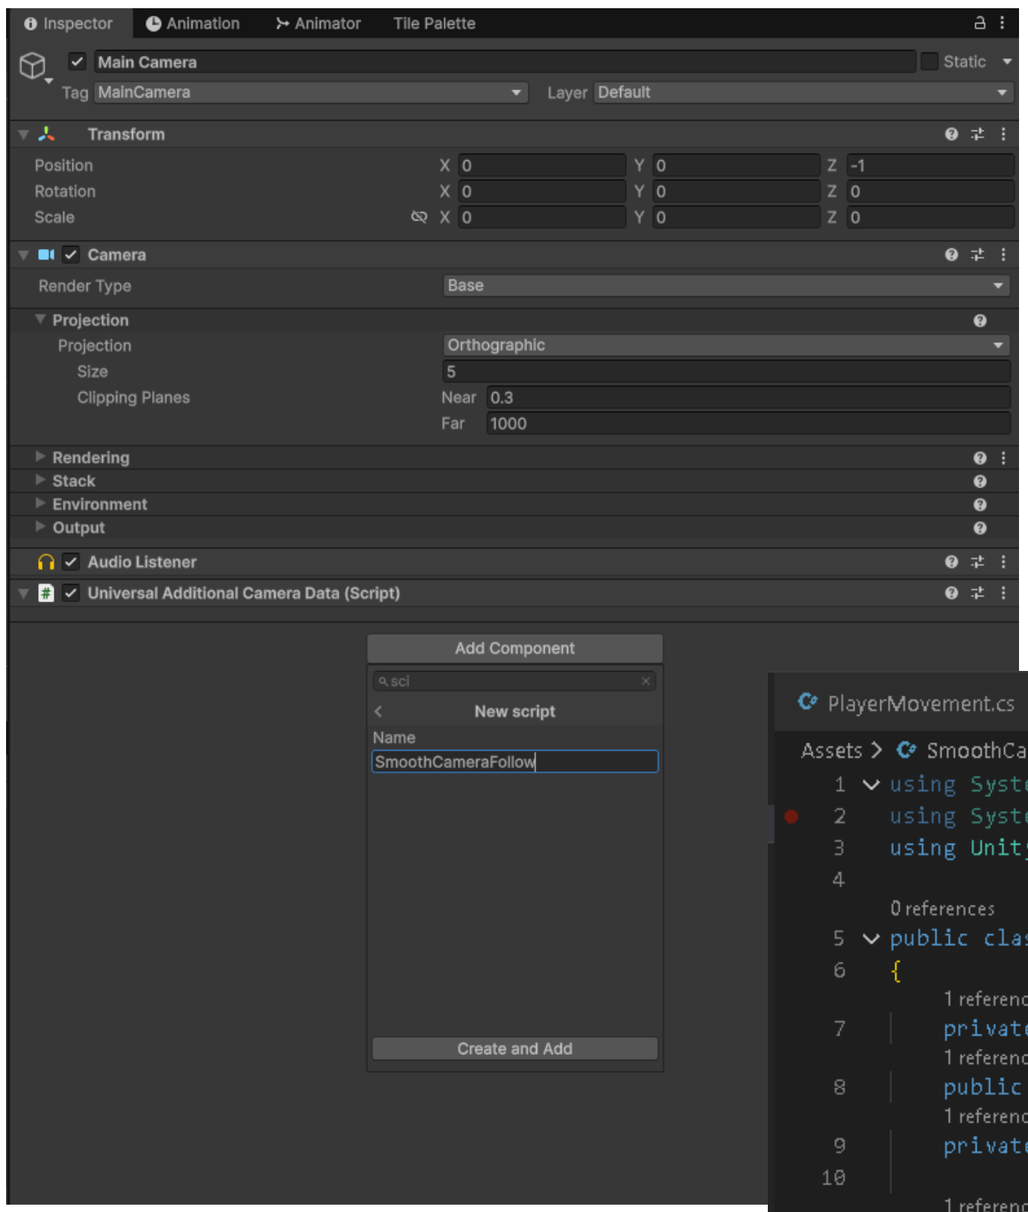

CREATE & ADD “SMOOTHCAMERAFOLLOW” SCRIPT TO MAIN CAMERA

PlayerMovement.cs | SmoothCameraFollow.cs

Assets > SmoothCameraFollow.cs > SmoothCameraFollow > FixedUpdate

```
using System.Collections;
using System.Collections.Generic;
using UnityEngine;

0 references
public class SmoothCameraFollow : MonoBehaviour
{
    1 reference
    private Vector3 offset;
    1 reference
    public float damping;
    1 reference
    private Vector3 velocity = Vector3.zero;

    1 reference
    public Transform playerTransform;

    0 references
    void FixedUpdate()
    {
        Vector3 targetPosition = playerTransform.position + offset;
        targetPosition.z = transform.position.z;

        transform.position = Vector3.SmoothDamp(transform.position, targetPosition, ref velocity, damping);
    }
}
```

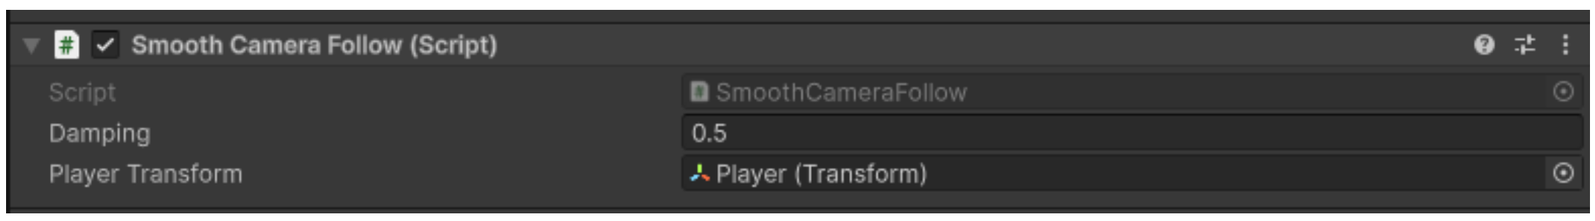

TO PREVENT GAPS APPEARING WHEN MOVING ON TILE SET ADD A BORDER TO EACH TILE (MAY HAVE TO USE AN EXTERNAL PIXEL ART EDITOR)

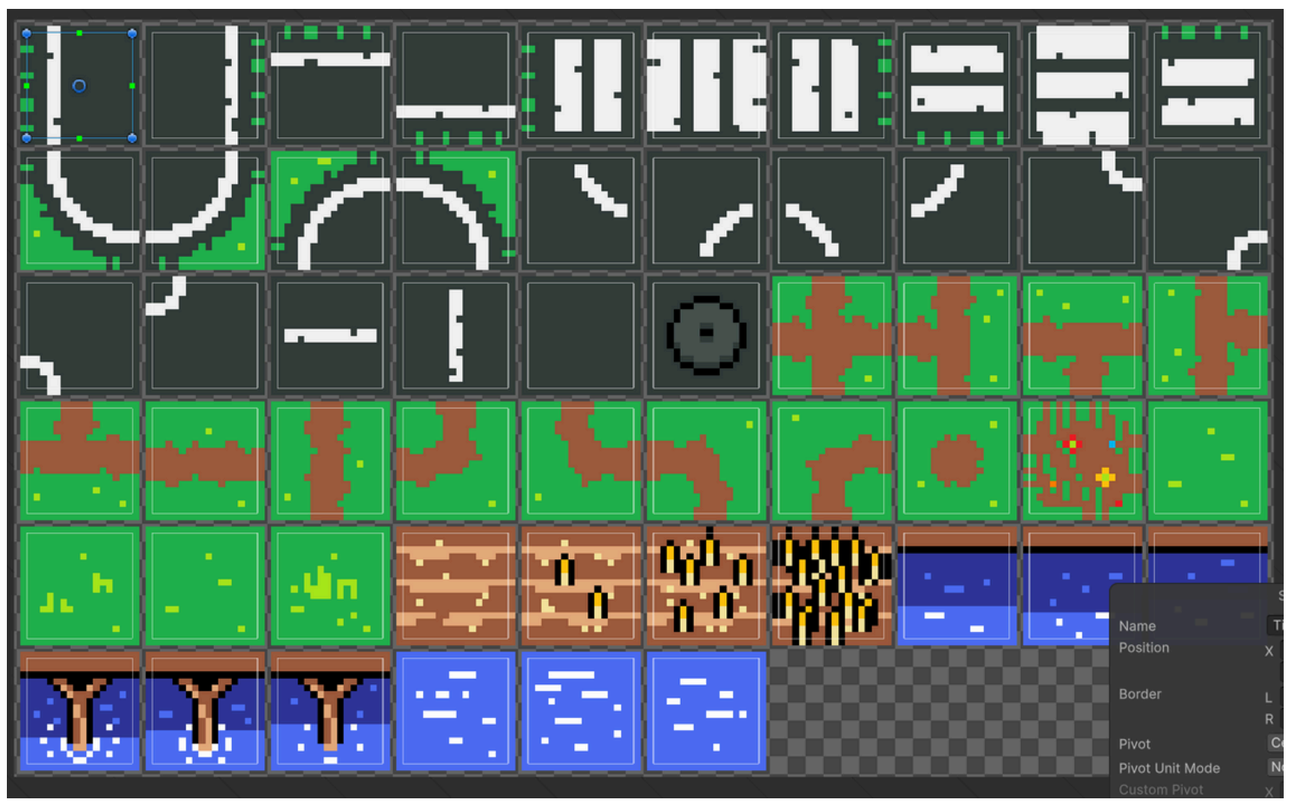

SHOOTING

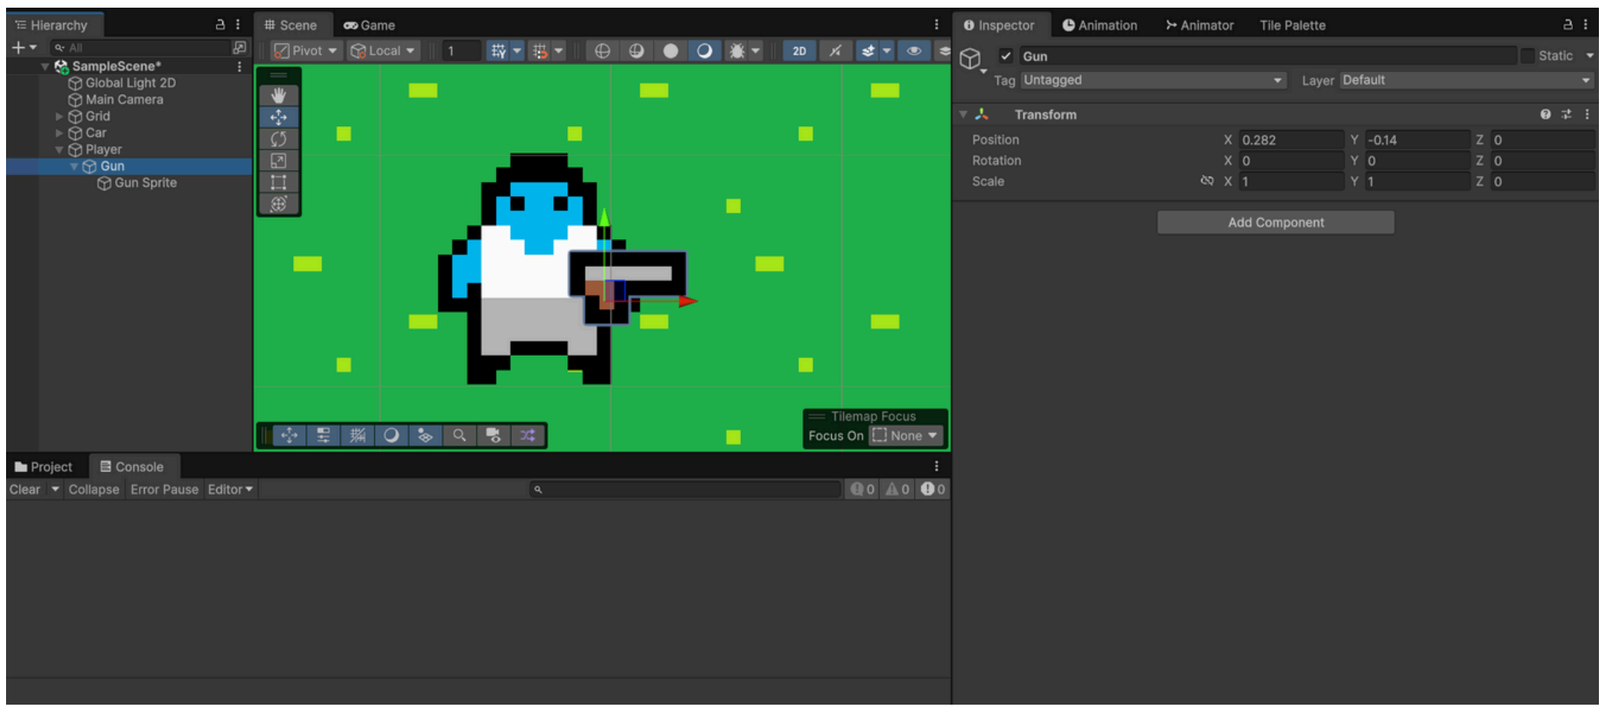

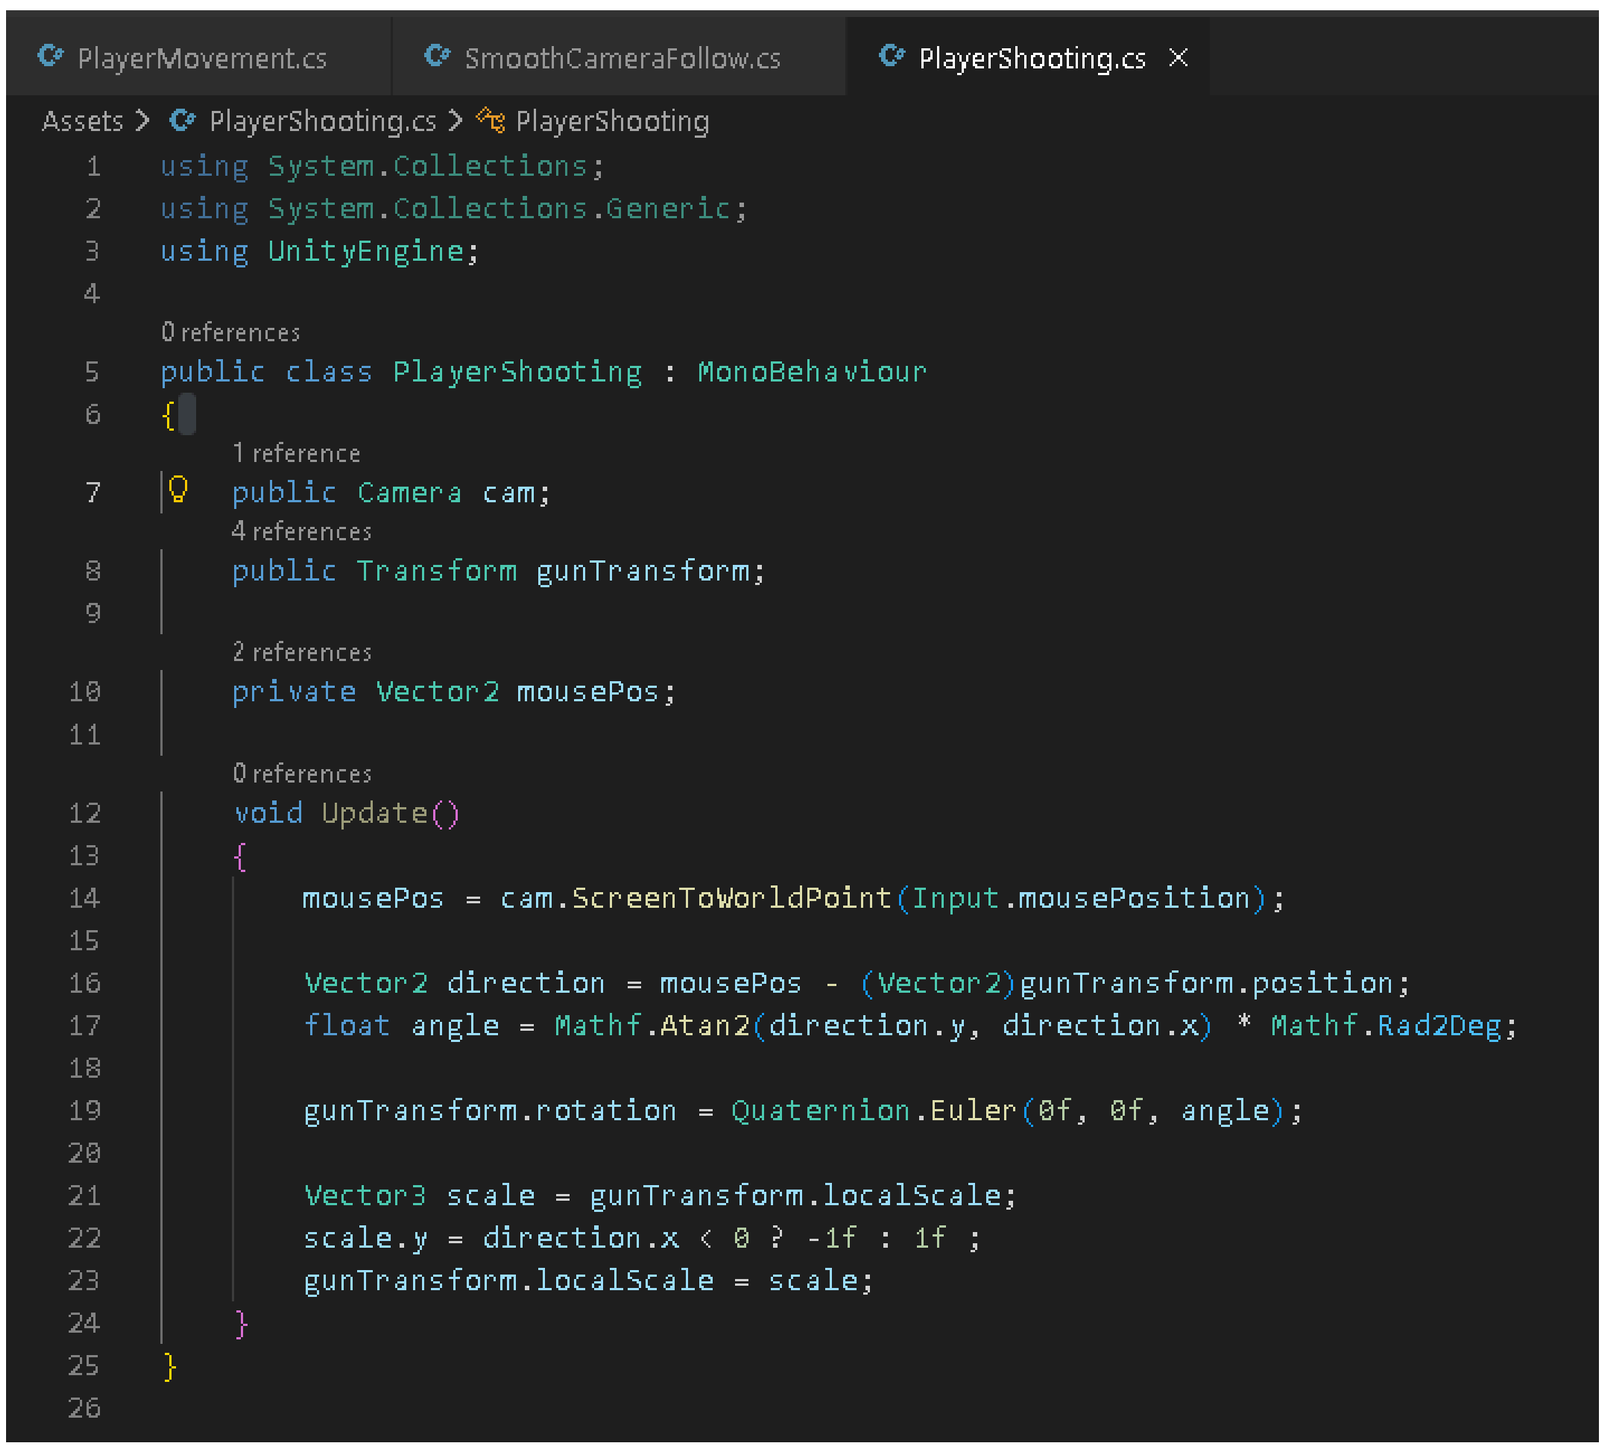

```
PlayerMovement.cs   SmoothCameraFollow.cs   PlayerShooting.cs
Assets > PlayerShooting.cs > PlayerShooting
using System.Collections;
using System.Collections.Generic;
using UnityEngine;

0 references
public class PlayerShooting : MonoBehaviour
{
    1 reference
    public Camera cam;
    4 references
    public Transform gunTransform;

    2 references
    private Vector2 mousePos;

    0 references
    void Update()
    {
        mousePos = cam.ScreenToWorldPoint(Input.mousePosition);

        Vector2 direction = mousePos - (Vector2)gunTransform.position;
        float angle = Mathf.Atan2(direction.y, direction.x) * Mathf.Rad2Deg;

        gunTransform.rotation = Quaternion.Euler(0f, 0f, angle);

        Vector3 scale = gunTransform.localScale;
        scale.y = direction.x < 0 ? -1f : 1f ;
        gunTransform.localScale = scale;
    }
}
```

CREATE AN EMPTY OBJECT NAMED GUN WITH A GUN SPRITE AS A CHILD, CHILDREN THESE TO THE PLAYER

CREATE A SCRIPT NAMED “PLAYERSHOOTING” ON THE PLAYER

IN THE SCRIPT MAKE THE GUN FACE THE CAMERA

BULLETS

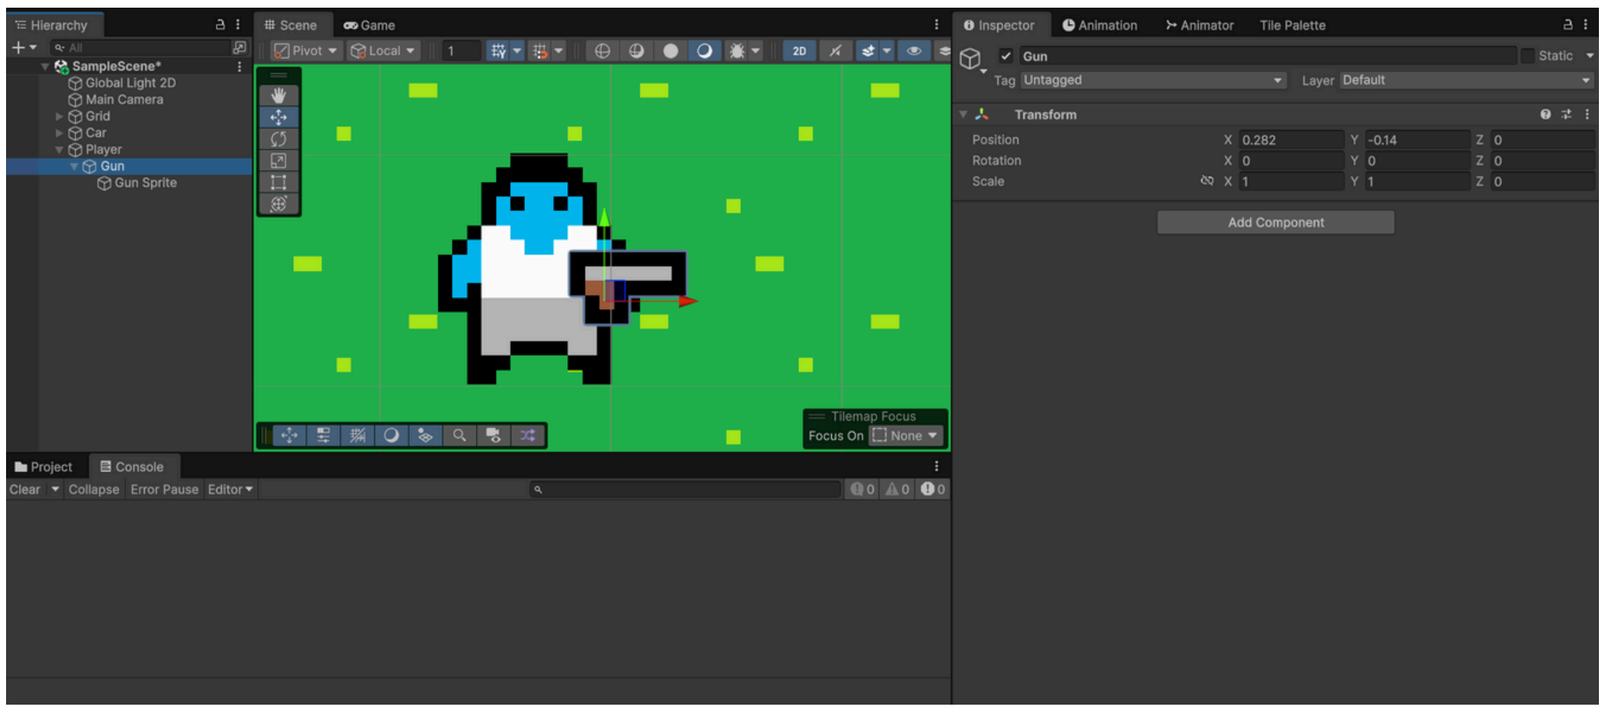

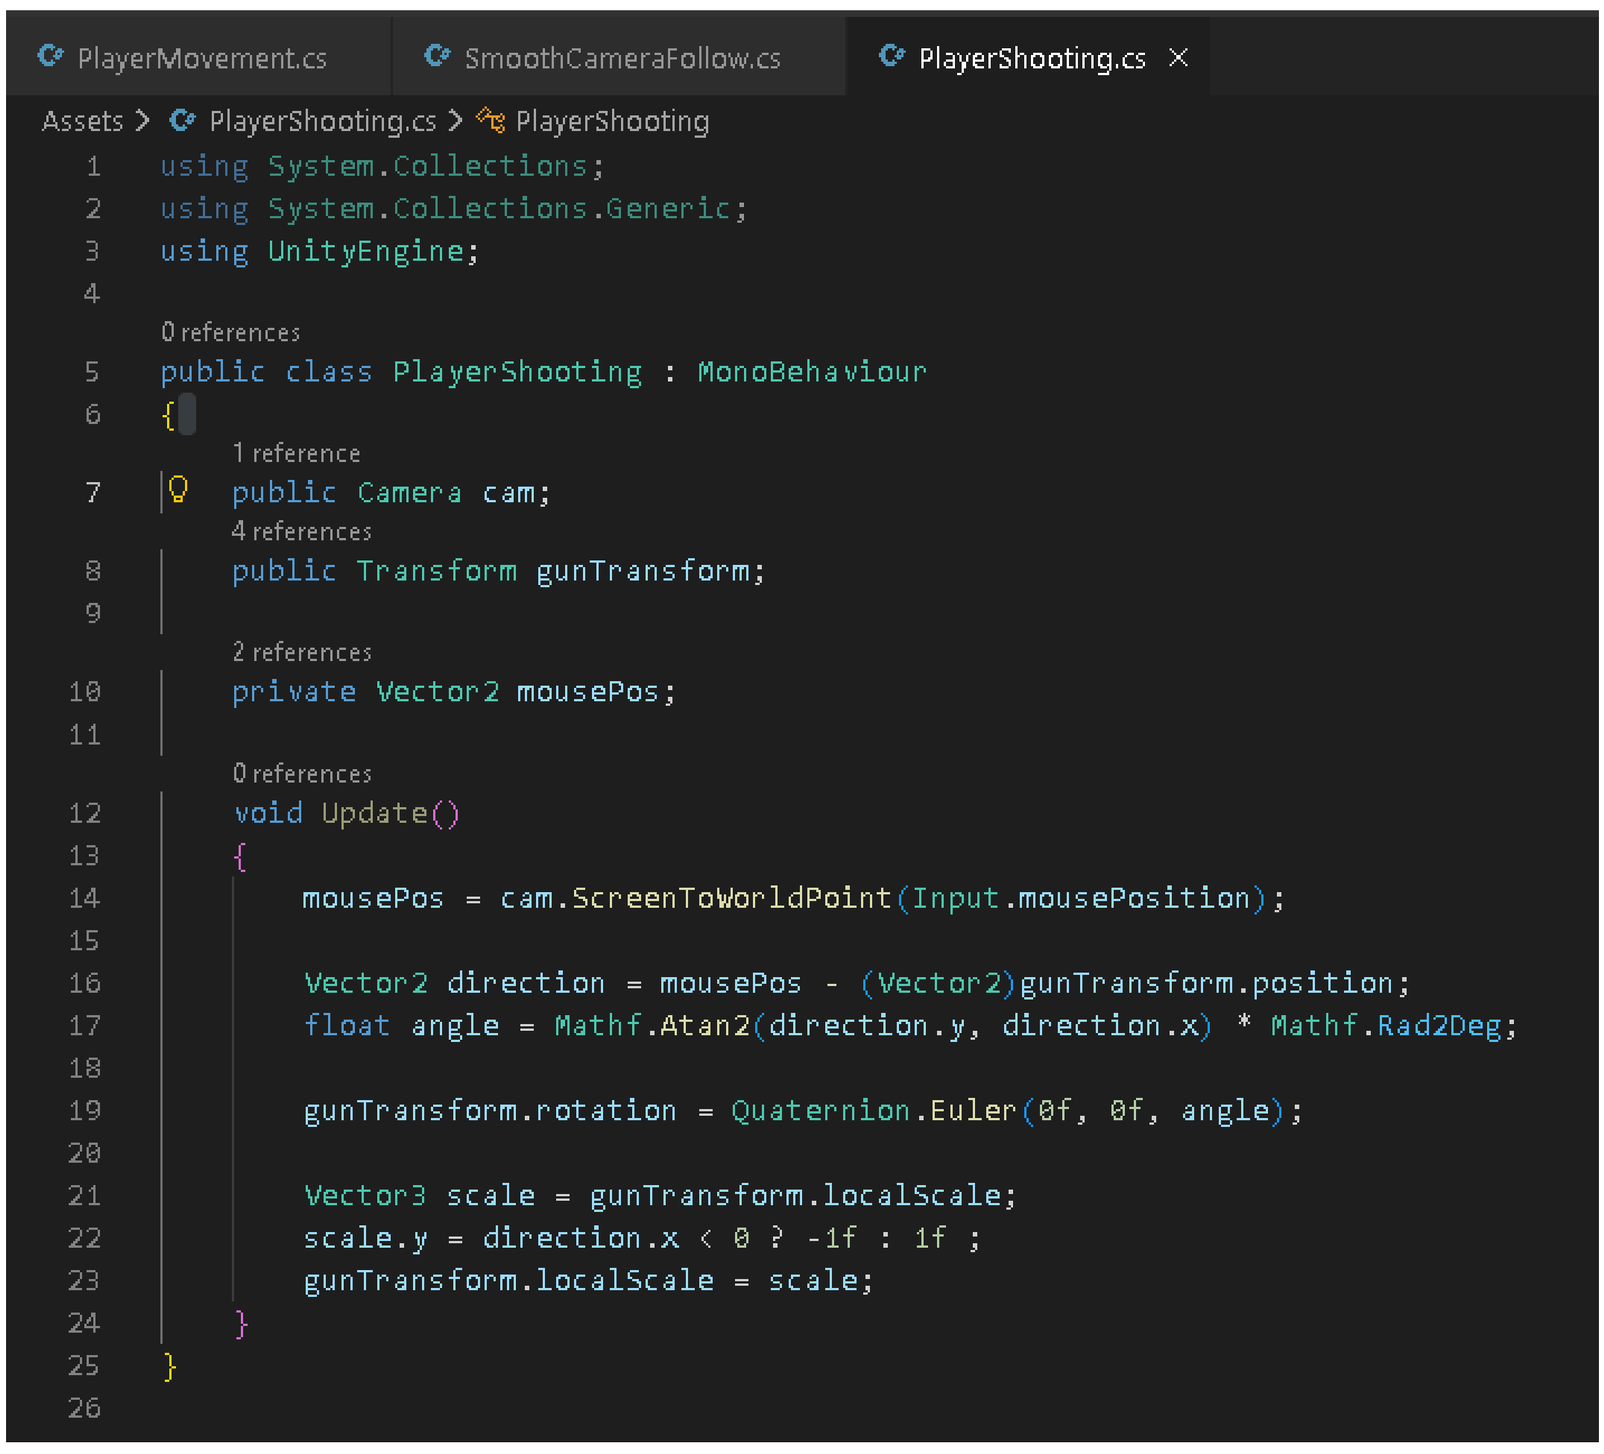

```
PlayerMovement.cs   SmoothCameraFollow.cs   PlayerShooting.cs
Assets > PlayerShooting.cs > PlayerShooting
using System.Collections;
using System.Collections.Generic;
using UnityEngine;

0 references
public class PlayerShooting : MonoBehaviour
{
    1 reference
    public Camera cam;
    4 references
    public Transform gunTransform;

    2 references
    private Vector2 mousePos;

    0 references
    void Update()
    {
        mousePos = cam.ScreenToWorldPoint(Input.mousePosition);

        Vector2 direction = mousePos - (Vector2)gunTransform.position;
        float angle = Mathf.Atan2(direction.y, direction.x) * Mathf.Rad2Deg;

        gunTransform.rotation = Quaternion.Euler(0f, 0f, angle);

        Vector3 scale = gunTransform.localScale;
        scale.y = direction.x < 0 ? -1f : 1f ;
        gunTransform.localScale = scale;
    }
}
```

CREATE AN EMPTY OBJECT NAMED GUN WITH A GUN SPRITE AS A CHILD, CHILDREN THESE TO THE PLAYER

CREATE A SCRIPT NAMED “PLAYERSHOOTING” ON THE PLAYER

IN THE SCRIPT MAKE THE GUN FACE THE CAMERA

BULLETS #2

```
PlayerMovement.cs | SmoothCameraFollow.cs | PlayerShooting.cs
Assets > PlayerShooting.cs > PlayerShooting > Shoot
4
    0 references
5   public class PlayerShooting : MonoBehaviour
6   {
7       //Gun Movement
            1 reference
8       public Camera cam;
            4 references
9       public Transform gunTransform;
            2 references
10      private Vector2 mousePos;
11
12      //Shooting
            3 references
13      public Transform firePoint;
            1 reference
14      public GameObject bulletPrefab;
            1 reference
15      public float bulletForce = 20f;
16
            0 references
17      void Update()
18      {
19          mousePos = cam.ScreenToWorldPoint(Input.mousePosition);
20
21          Vector2 direction = mousePos - (Vector2)gunTransform.position;
22          float angle = Mathf.Atan2(direction.y, direction.x) * Mathf.Rad2Deg;
23
24          gunTransform.rotation = Quaternion.Euler(0f, 0f, angle);
25
26          Vector3 scale = gunTransform.localScale;
27          scale.y = direction.x < 0 ? -1f : 1f ;
28          gunTransform.localScale = scale;
29
30          if (Input.GetButtonDown("Fire1"))
31          {
32              Shoot();
33          }
34      }
35
            1 reference
36      void Shoot()
37      {
38          GameObject bullet = Instantiate(bulletPrefab, firePoint.position, firePoint.rotation);
39          Rigidbody2D bulletRB = bullet.GetComponent<Rigidbody2D>();
40          bulletRB.AddForce(firePoint.right * bulletForce, ForceMode2D.Impulse);
41      }
42  }
43
```

ADD AN EMPTY OBJECT NAMED BARREL TO THE GUN

CREATE A SCRIPT NAMED “PLAYERSHOOTING” ON THE PLAYER

SET PLAYER TAG TO PLAYER

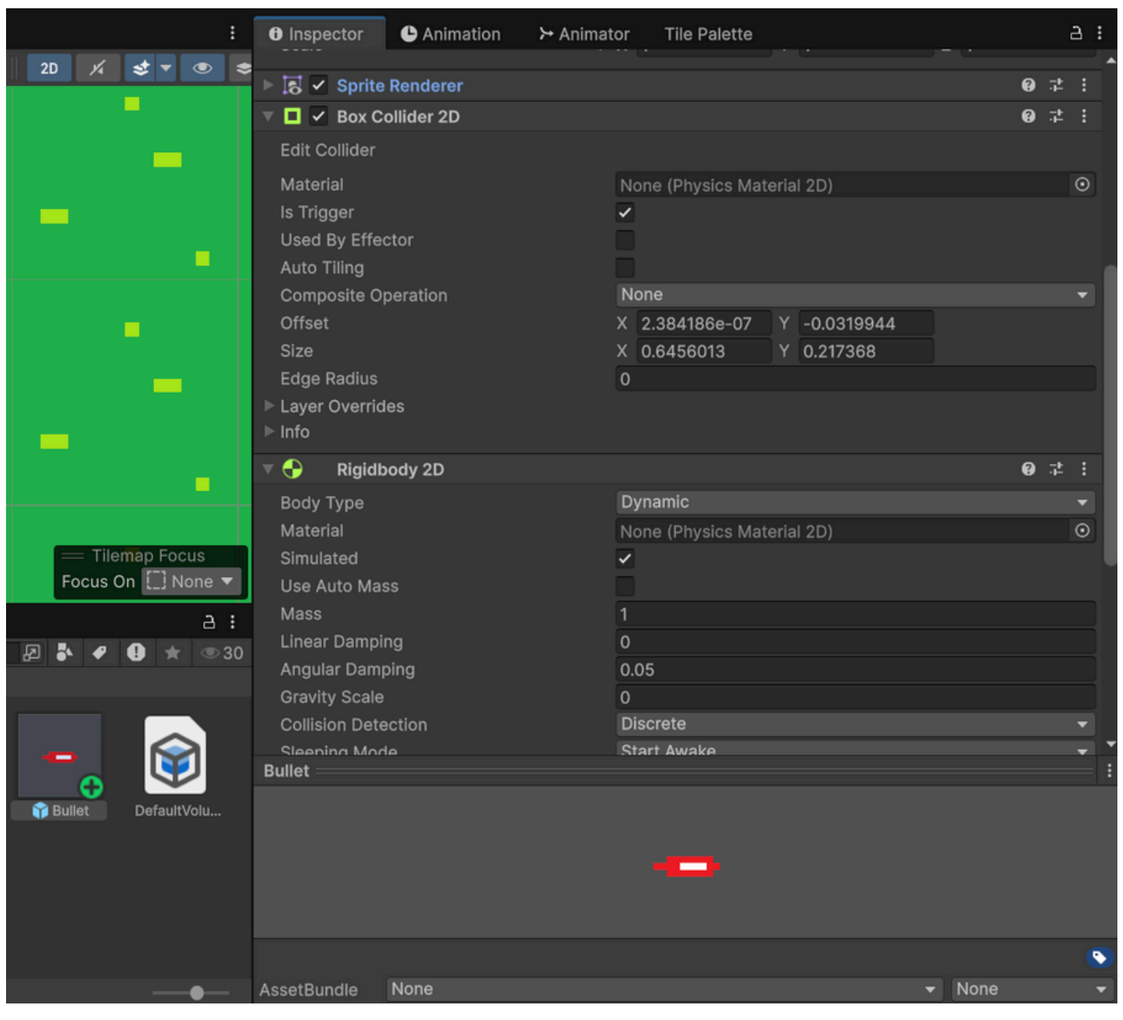

CREATE A BULLET PREFAB WITH A 2D BOX COLLIDER & 2D RIGIDBODY

SET THE COLLIDER TO BE A TRIGGER, AND THE RIGIDBODY TO HAVE 0 GRAVITY

CREATE A SCRIPT NAMED “BULLET” AND ADD TO THE BULLET

BULLETS #3

PlayerMovement.cs | SmoothCameraFollow.cs | PlayerShooting.cs | Bullet.cs

Assets > Bullet.cs > Bullet > OnCollisionEnter2D

```
using System.Collections;
using System.Collections.Generic;
using UnityEngine;

0 references
public class Bullet : MonoBehaviour
{
    1 reference
    public GameObject hitEffect;
    1 reference
    public float effectTime = 5f;

    0 references
    void OnCollisionEnter2D(Collision2D collision)
    {
        if (collision.gameObject.CompareTag("Player"))
            return;

        GameObject effect = Instantiate(hitEffect, transform.position, Quaternion.identity);
        Destroy(effect, effectTime);
        Destroy(gameObject);
    }


}
```

CREATE AN EXPLOSION PREFAB IN THE EDITOR

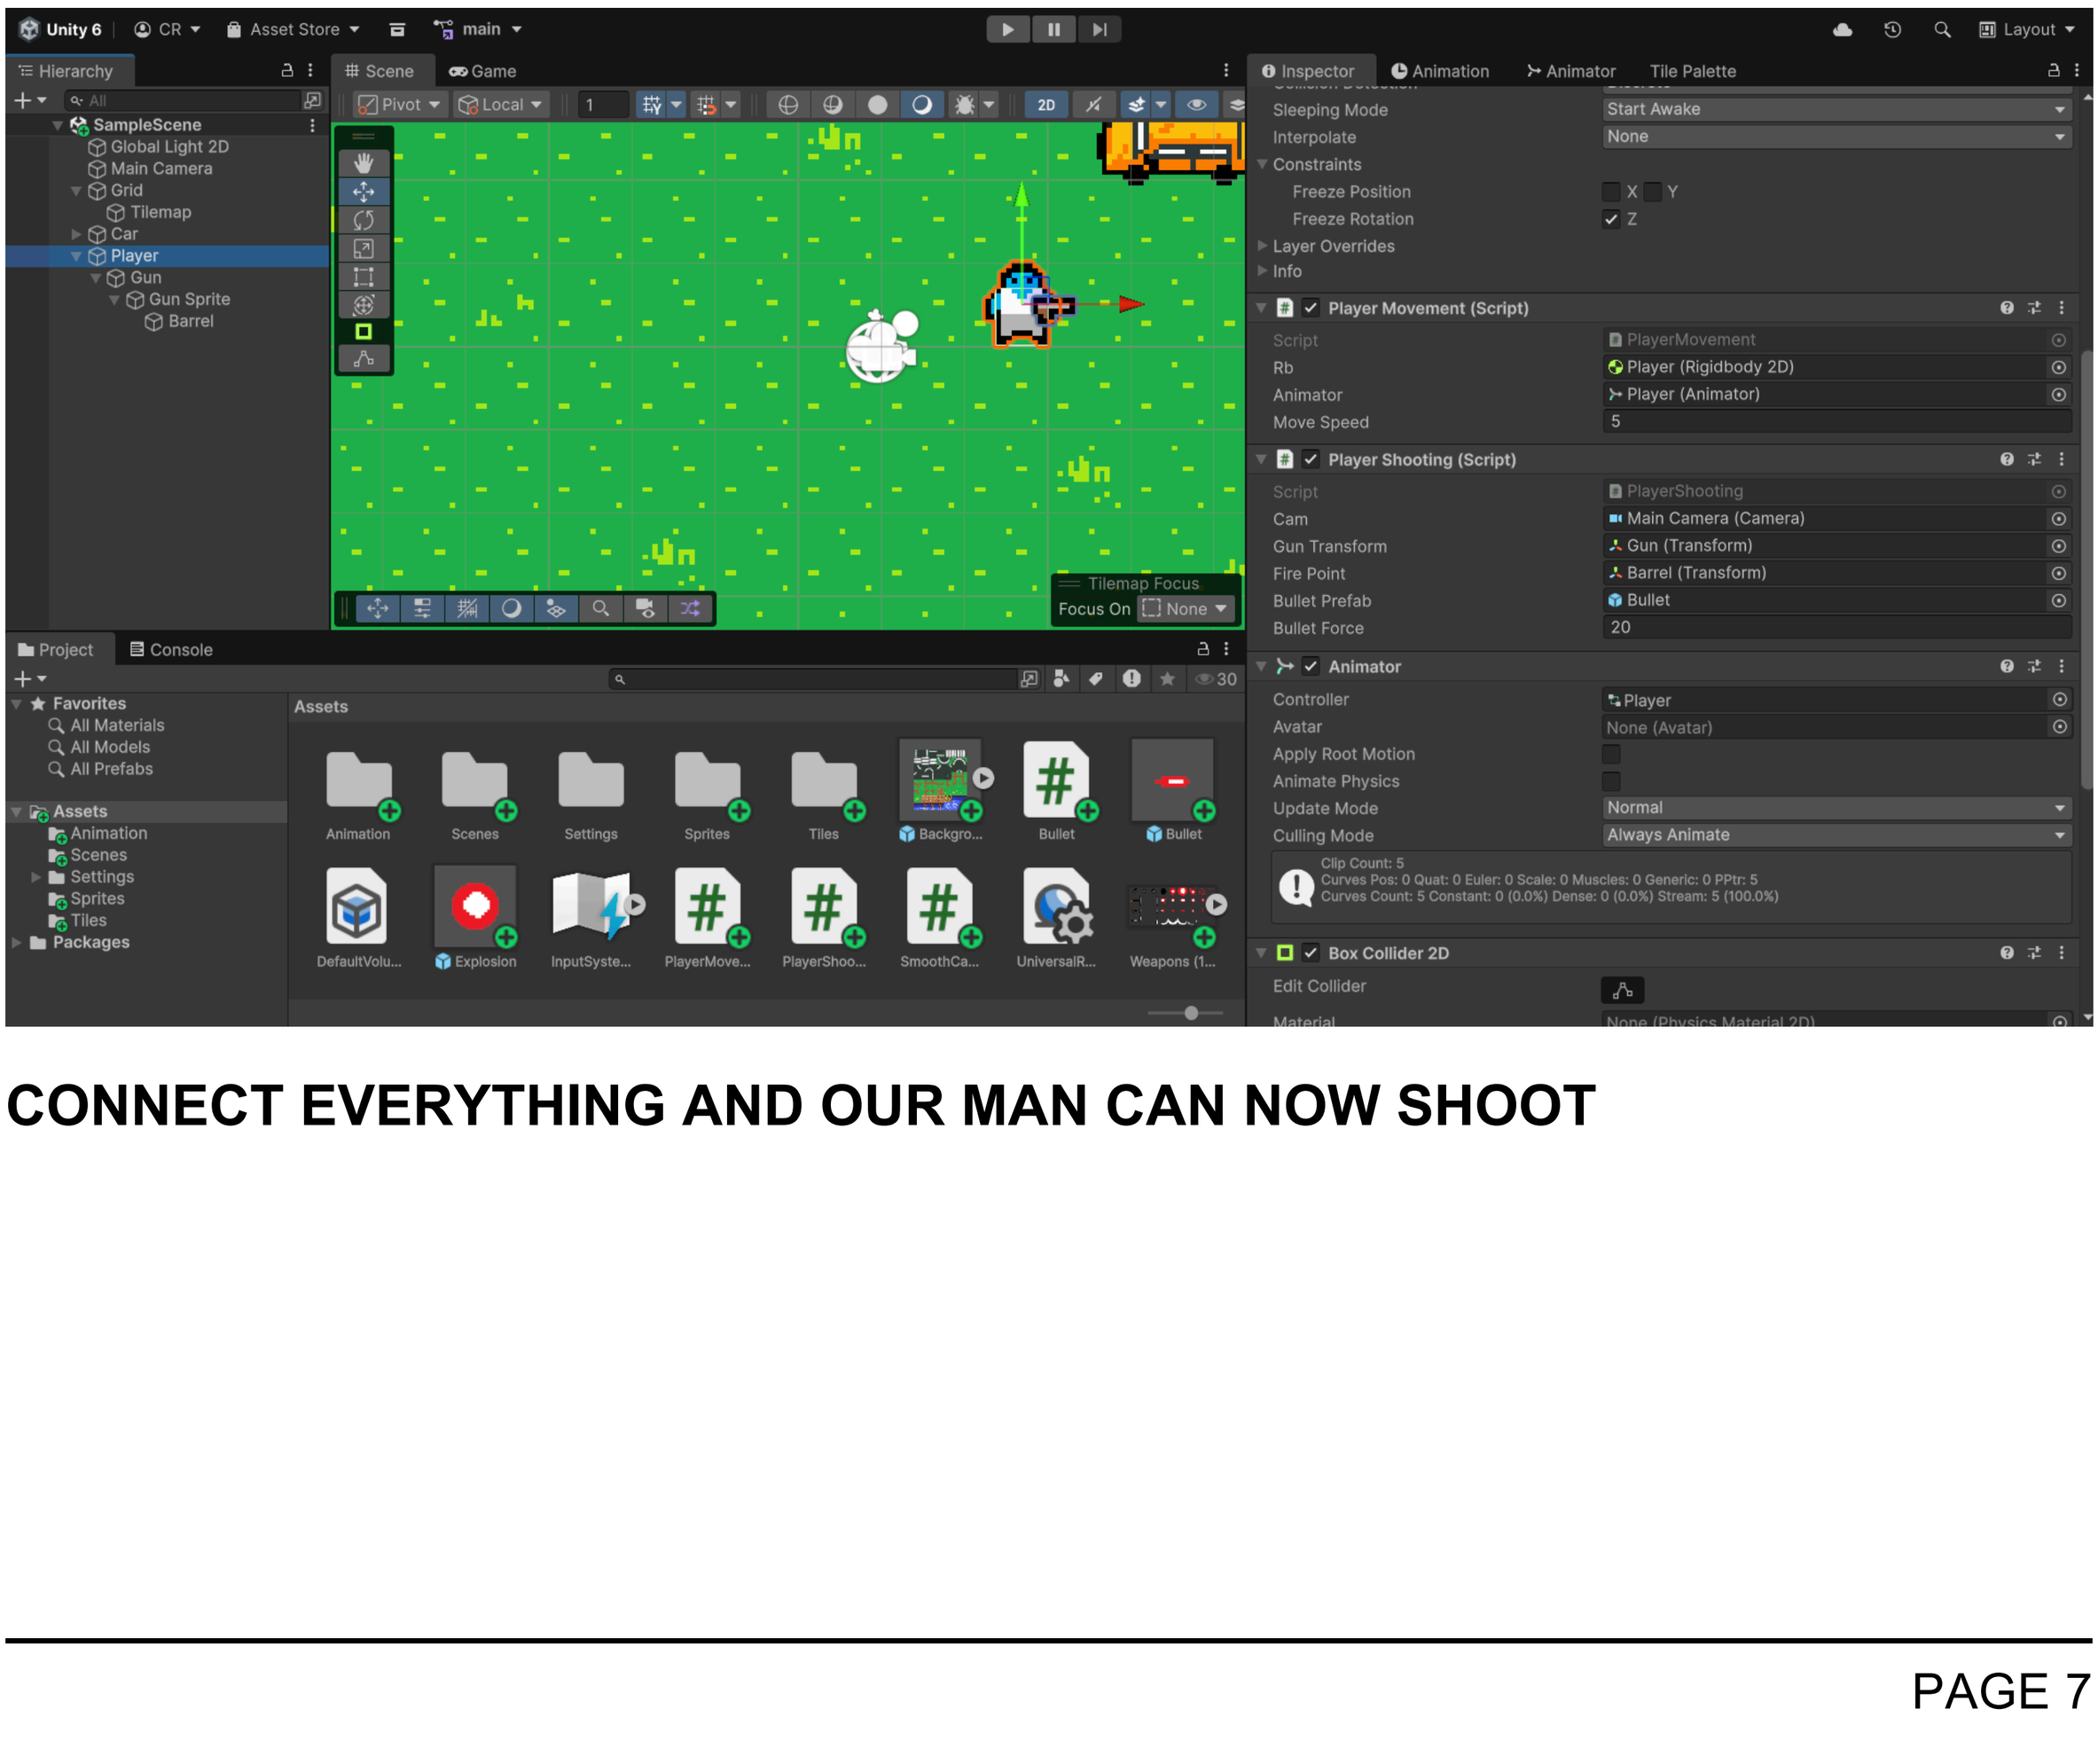

CONNECT EVERYTHING AND OUR MAN CAN NOW SHOOT

CONCLUSION

Mana Rock Gaming

MANA ROCK GAMING WEBSITE

HTTPS://WWW.MANAROCKGAMING.COM/

KERSHAW COUNTY VIDEO GAME PROGRAMMERS, DESIGNERS, & ARTISTS

HTTPS://DISCORD.GG/3DGAPPVKCS

KCL | KERSHAW COUNTY LIBRARY

KERSHAW COUNTY EVENTS PAGE

HTTPS://WWW.KERSHAWCOUNTYLIBRARY.ORG/EVENTS/PROGRAMMING-WITH-CONOR/

YOUTUBE TUTORIAL

HTTPS://WWW.YOUTUBE.COM/WATCH?V=WHZOMFGJT50